


LOAD CELL CHARACTERISTICS	
CAPACITY	500, 1000 (gf)

Interface Inc. claims proprietary rights in the information disclosed hereon. This drawing is furnished in confidence on the express understanding that neither it nor any reproduction thereof will be disclosed to others or used for the purpose of manufacture or procurement of the article or part shown hereon without written permission of Interface Inc. The drawing shall remain the property of Interface Inc. and shall be returned upon request by Interface Inc.

80713

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/07/08	
B	0.0005" DEFLECTION WAS 0.001"	01/07/09	
C	UPDATED TO CURRENT STANDARDS	01/23/2017	BB

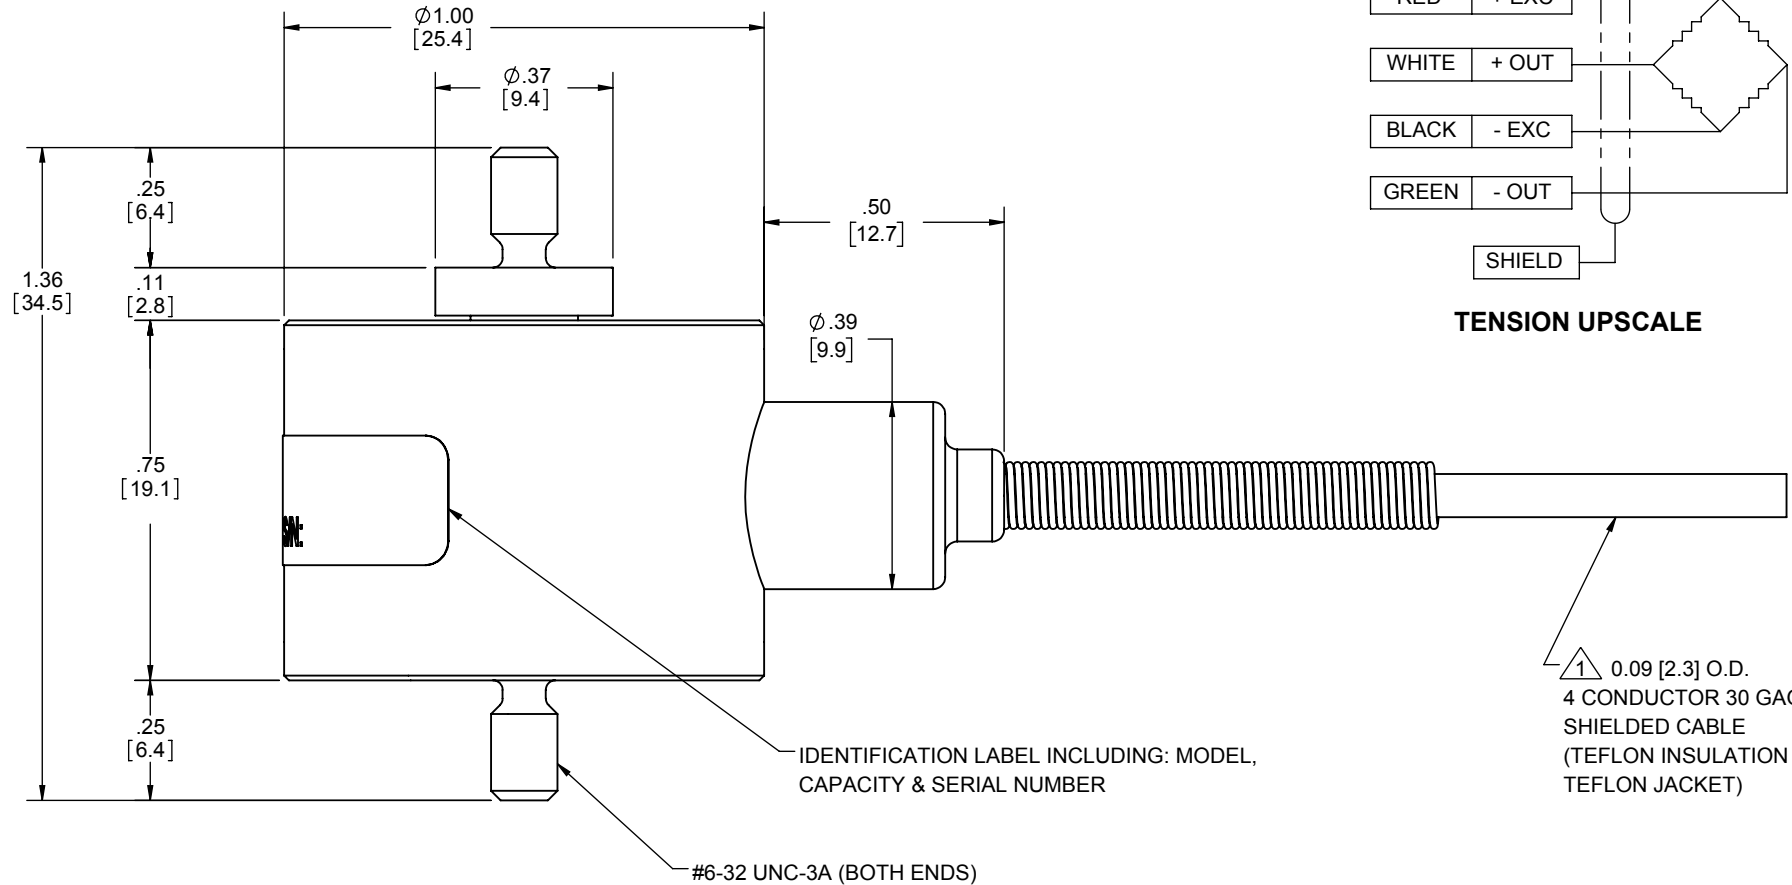

2. FULL SCALE DEFLECTION:
 1000 gf: 0.001 INCH
 500 gf: 0.0005 INCH

1 STANDARD CABLE LENGTH IS 5 FEET [1.5 M]
 NON-STANDARD CABLE LENGTH PER OPTION CODE.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [mm]	
TOLERANCES ARE:	
ANGLES	± 0° 30'
.XX	± .01 [0.25]
.XXX	± .005 [0.13]
CREATOR	DATE
DESIGNED: JOE G.	07/07/2008
DETAILED: M.S.E.	07/07/2008
WEIGHT: (APPROX) 0.1 (lbs)	

interface
 ADVANCED FORCE MEASUREMENT
 7401 E. BUTHERUS DR. SCOTTSDALE, AZ USA 85260

TITLE:
**OUTLINE MODEL:
 WMCP-500G, -1000G**

SIZE: DWG. NO:
A 80713

SCALE: 2.5:1 SHEET 1 OF 1

REV: **C**